
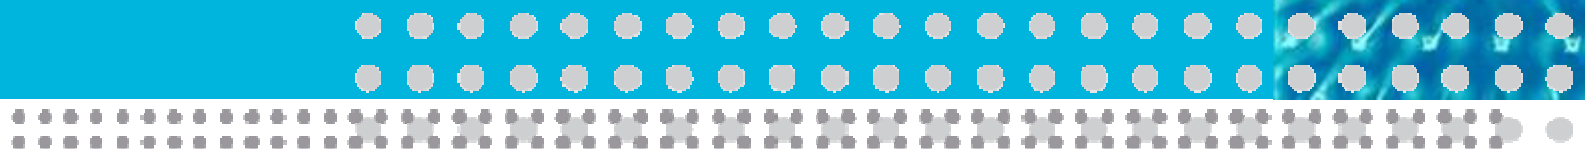


Next Generation Networks MultiService Network Design

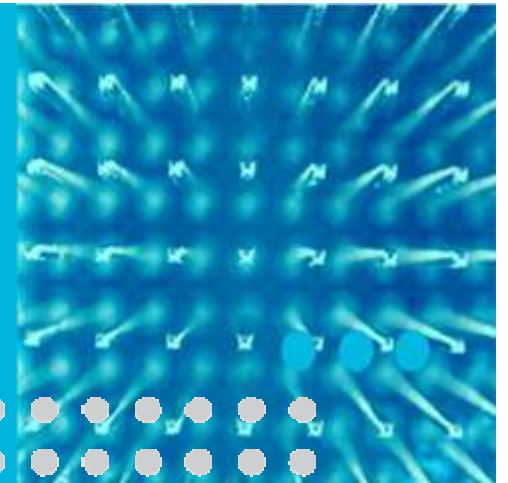

Dr. Ben Tang

April 23, 2008

Operators face difficult network planning and design questions

- Can your current planning methods handle the complexity of network design with **multiple applications on a single shared infrastructure**?
- Can you estimate the impact of your applications on the **traffic in an IP** environment?
- Does your network architecture and design accommodate **varying QoS and reliability** for multiple applications?
- Do you have a unified process spanning **multiple network layers** and **multiple vendors' equipment**?
- Does your process allow for **uncertainty in forecasts**?
- Does your **business case prove in**, and how **sensitive** is it to various assumptions?



Next Generation Network transformation is a complex undertaking and requires a unified multi-service, multi-layer and multi-vendor approach

A Unified Multi-Layer Approach to NGN Design

Application Characterization and Traffic Modeling

All of the NGN applications must be characterized and traffic models developed in order to calculate traffic loads on all the network layers

Control Plane

The signaling traffic loads must be used to determine the optimal control network topology and configure nodes

Converged IP/MPLS Core


The signaling and bearer traffic loads, broken down into Classes of Service, must be routed and the nodes and links configured

Carrier Ethernet

The traffic must be assigned to Spanning Trees based on Classes of Service, which must be designed and nodes and links configured

Optical Transport

The required link bandwidths and application protection needs will drive the optical transport design

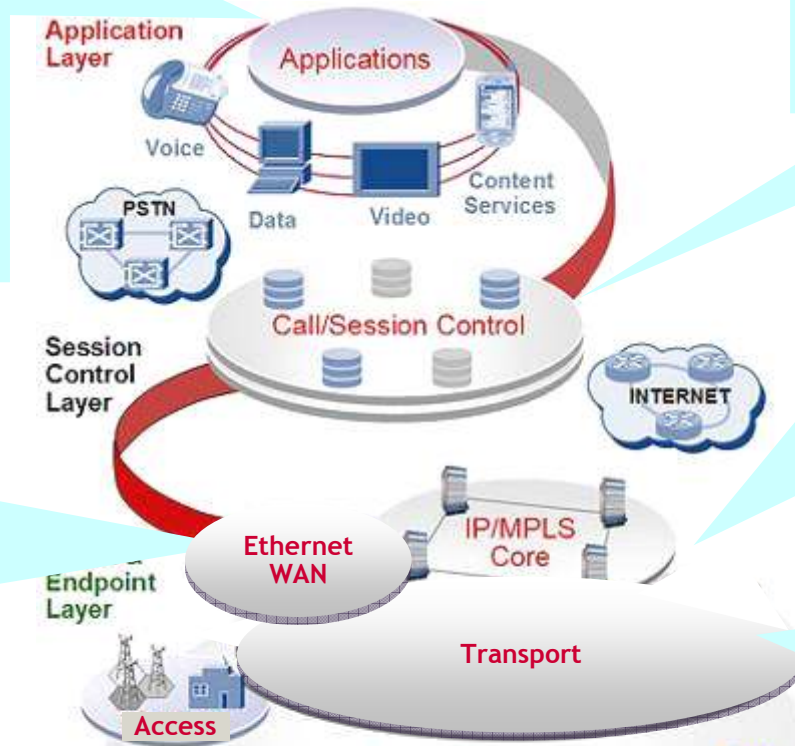


- ❑ Quality of Service and Reliability built into each layer of the design
- ❑ The entire results can be analyzed in a single business case

Application Characterization and Traffic Modeling

NGN requires new techniques for modeling network traffic in order to facilitate introduction of new services

- Quickly assess the impact of introducing a new set of applications
- Avoid traffic congestion and consequent degradation of service
- Control both Capex and OpEx by avoiding extensive over-engineering

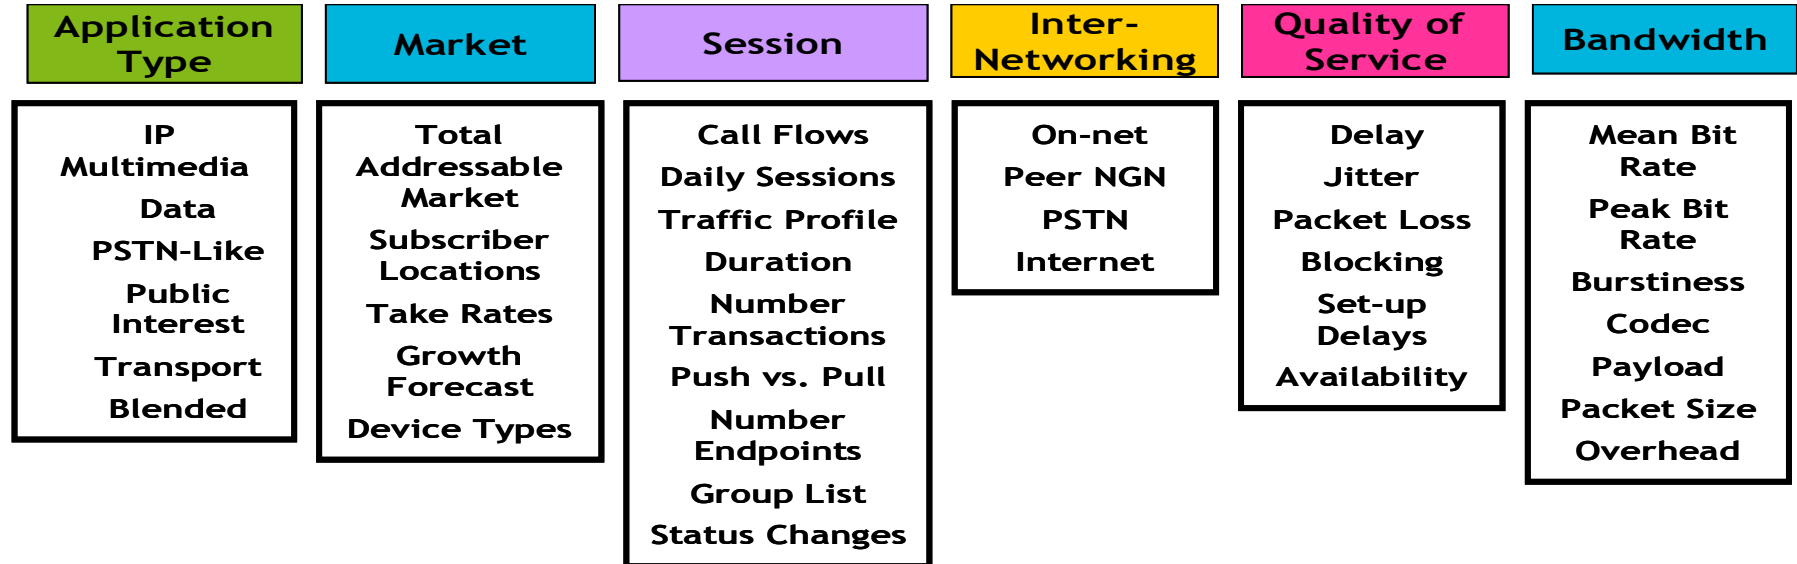


Application-Driven Traffic Models are needed to:


- Systematically determine the impact of a specific service mix
- Calculate aggregate signaling and bearer traffic loads, according to a number of dimensions
- Provide a consistent and re-usable traffic model used for all layers of the design
- Allow “what if” studies where application assumptions are varied and fed through the design

Characterizing Applications and Calculating Traffic


■ Daily Traffic Profile

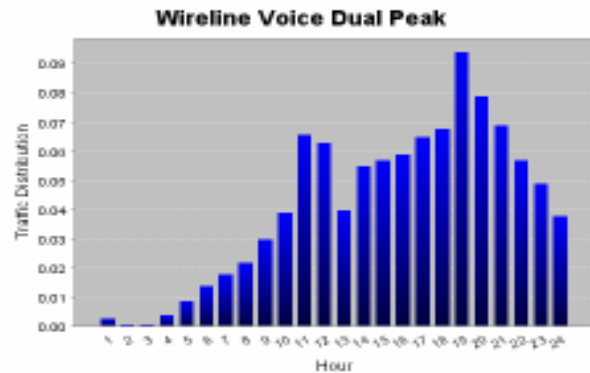

■ Call Flow

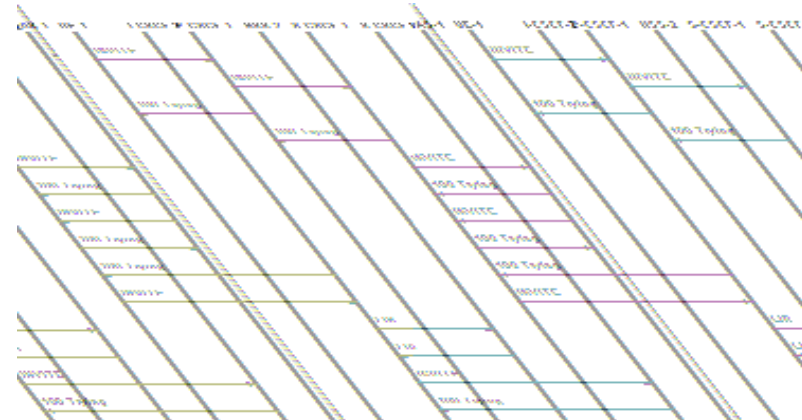


■ Traffic Descriptors

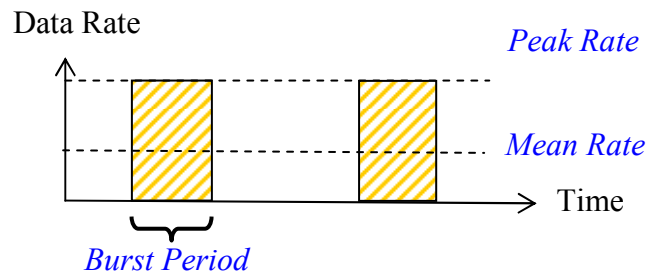


Effective bandwidth calculated based on multiplexing and traffic descriptors specified for dynamic applications

■ Internetworking

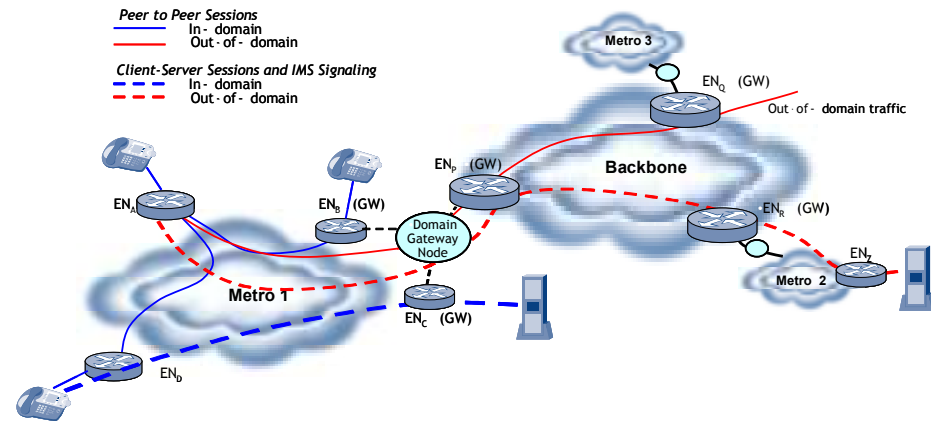

- For each application, calculate the point-point demands and loads on control functions
- Aggregate traffic with common Quality of Service requirements for routing

Designing an IMS Control Layer Network

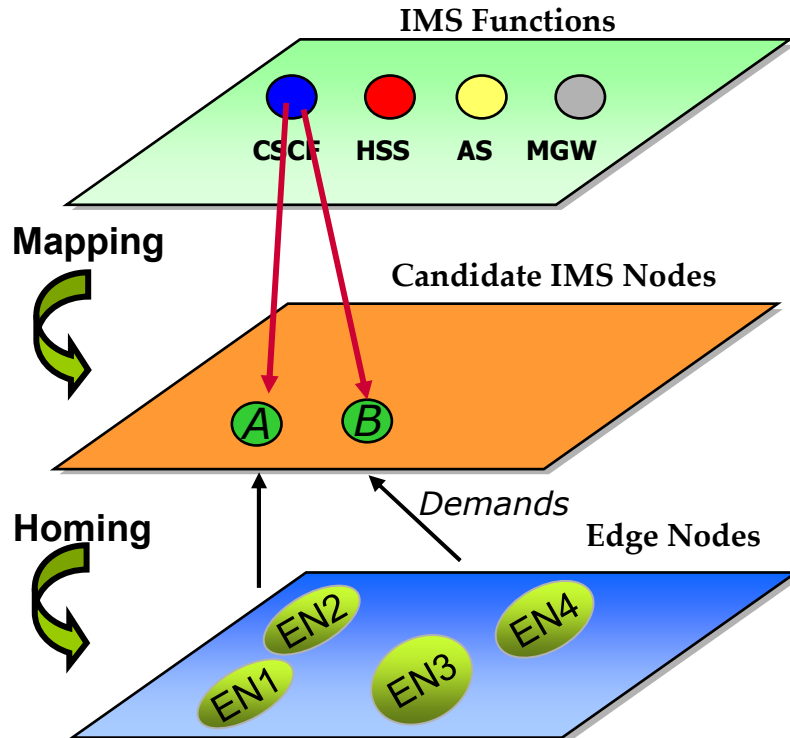


The load on the IMS control functional elements is input to the design which determines the:

- Optimal topology,
- Number and location, and
- Homings on end-users for each of the IMS functional network elements.

Once the location of the IMS elements and homing are known, accurate point to point traffic matrices for the signaling traffic can be constructed.


□ IMS Control Layer traffic becomes an input to the lower layer transport design

Creating Aggregate Traffic Loads

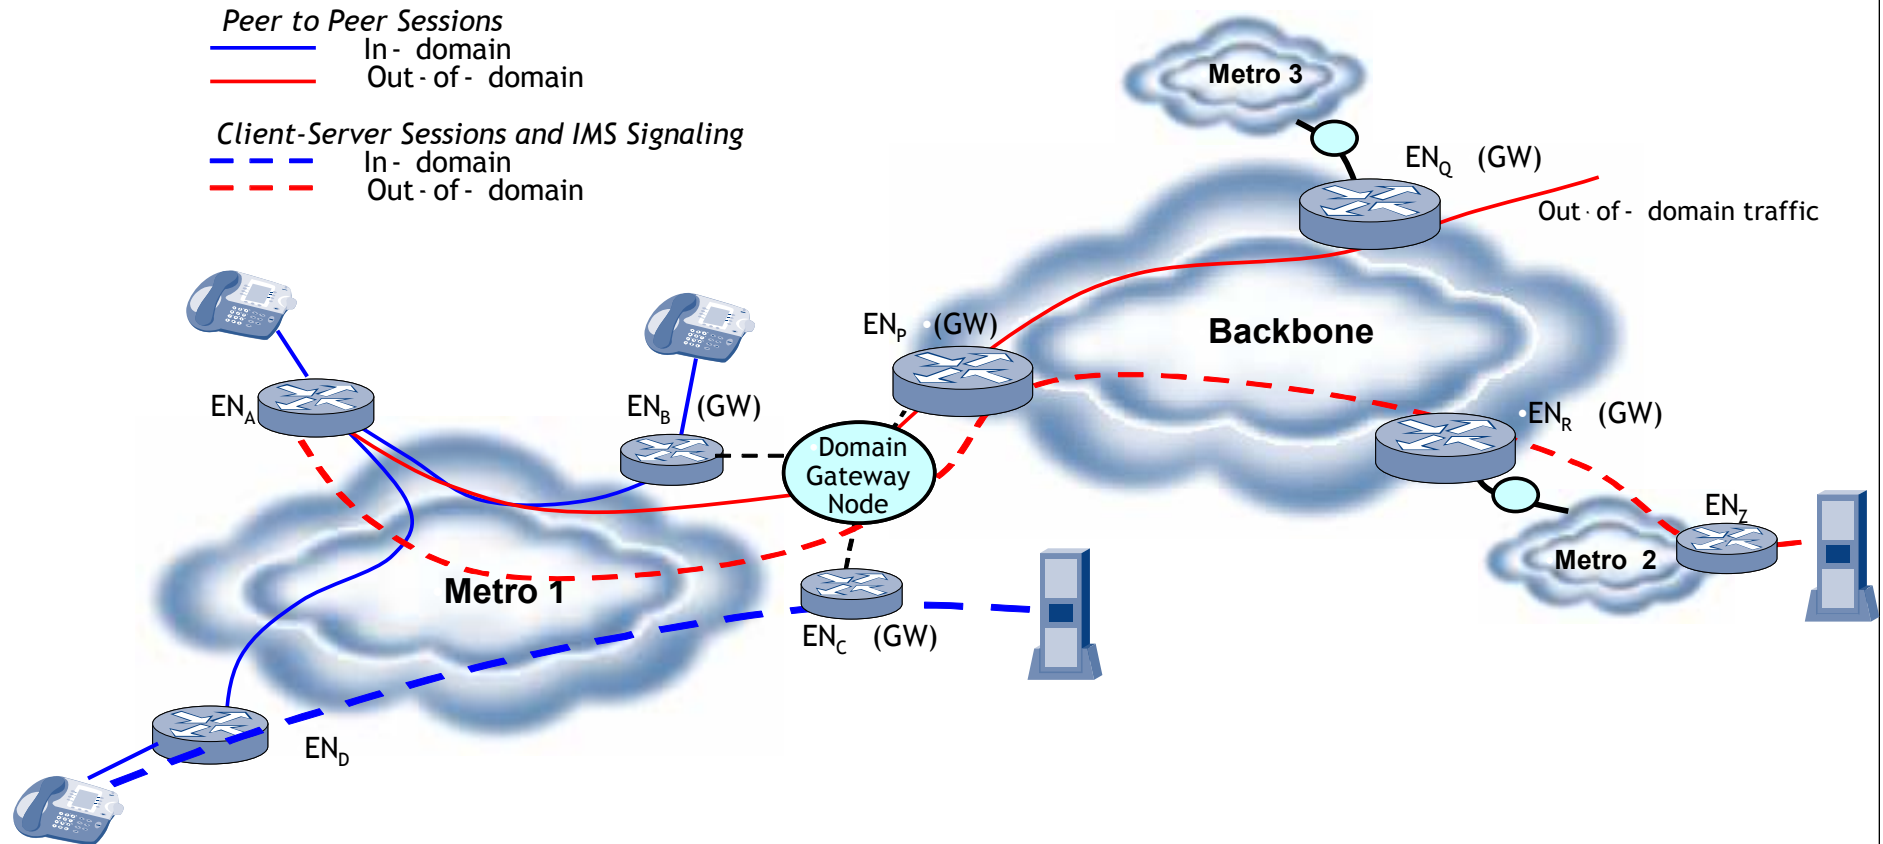

- Each session is characterized as peer-peer, client-server or server-server.
- P-P traffic is distributed within the domain using a gravity model
- C-S and S-S traffic is calculated based on location of the edge node and server(s)
- The out of domain traffic is routed through domain gateways


MPLS Network Design - Key Issues

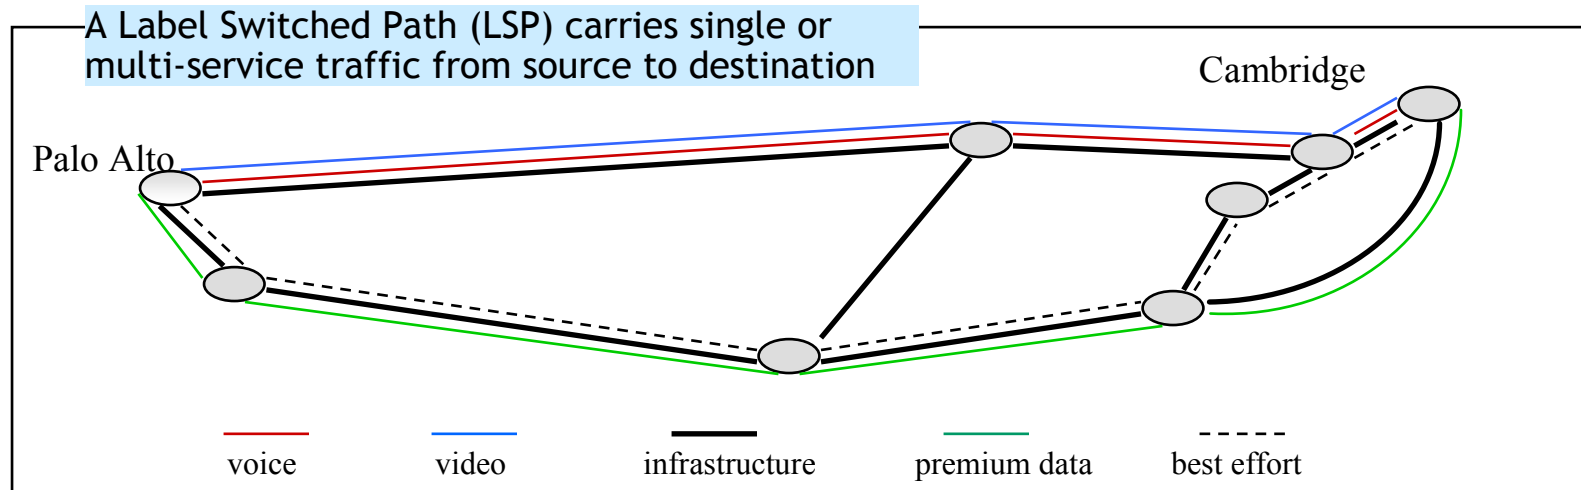

- **Traffic Uncertainty** - Avoid network over-engineering or potential traffic congestion
- **Effective Bandwidth** - What are the BW requirements for each LSP, considering dynamic traffic generated by applications?
- **Minimal Cost Topology Design** - Assure sufficient network capacity at minimal cost
- **Optimized Routing of LSPs** to maximize BW efficiency while meeting QoS constraints
- **Protection of high priority traffic** at a minimal cost

□ Solving MPLS Design Issues Requires Intelligent and Complex Optimization Algorithms

Topology & Spanning Tree Design

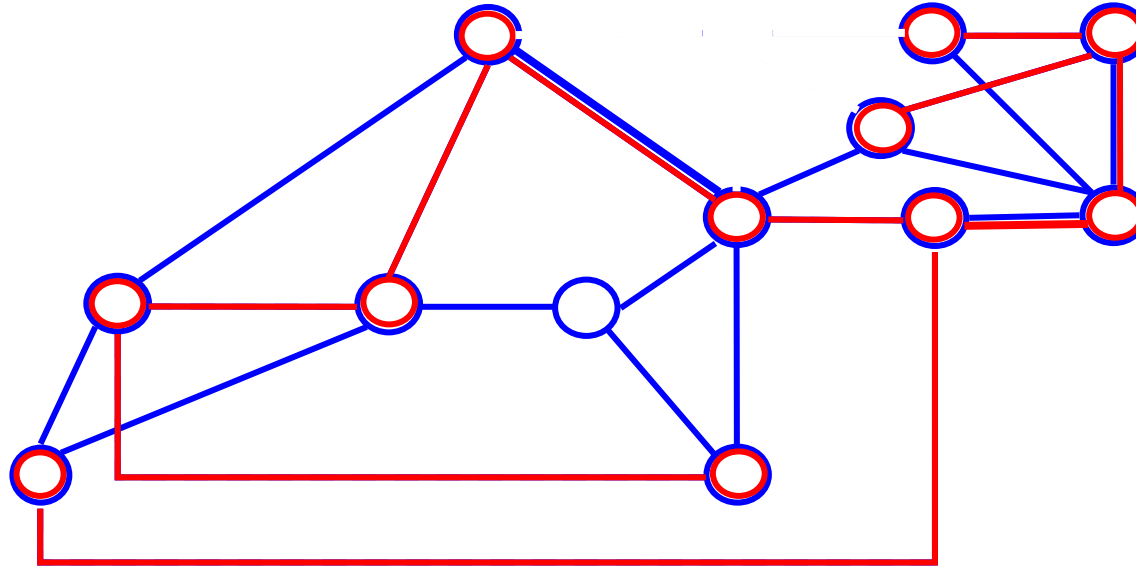

- Ethernet design challenge: you get less capacity than what you can see in design - Spanning Tree Protocol (STP) always forms trees to carry traffic
 - Multiple spanning trees must be designed based on traffic load to support differentiated QoS, balance load, and increase network utilization
 - In case of a single link or node failure, new backup trees are chosen by STP to redirect traffic
- ❑ Multiple Spanning Trees must be designed for different classes of service.
 - ❑ Single failure modes should be taken into account to ensure adequate backup capacity on secondary spanning trees

A Design Example (1)

Scenario - An end-to-end network design across IMS and MPLS backbone, with a financial assessment


- Network Data Collection
 - 18 access nodes and 9 edge nodes (with coordinates)
 - 2 IMS locations
 - OC12 POS or 10GE as BB links
- Application Characterization and Traffic Modeling (ACTM)
 - 9 end-user applications - VoIP, IM, phonebook, conferencing for consumer & enterprise wireless and wireline users
 - 4 transport applications - ATM and L2 VPN
 - Generate traffic data
 - Busiest-hour session demands, traffic descriptors and CoS for end-user applications
 - Demand matrices and Cos for transport applications

The image displays a multi-windowed software interface for network design. The top window, titled "Multiservice Network Design Platform", shows a project overview with sections for "Design Project", "MSND Design Tool", and "Other Design Tool". Below this, a network topology diagram is visible, showing a central node connected to several peripheral nodes, with red text "Data Collection" overlaid on the diagram. The bottom window, titled "MSND Applications Characterization and Traffic Modeling Module - ACTM, Training_1", shows a configuration window for "Update Transport Application - Parameters". This window includes a table for "Define Applications" with columns for "End-user Application" and "Transport Application". The "Transport Application" section is expanded, showing parameters for "Applications: ATM", such as "Lowest layer of protocol" (set to ATM), "Class of Service" (set to ATM n-VER), "Constant Bit Rate" (unchecked), "DBR: traffic uncertainty, 0 to 1" (0.0), "Reliability: availability percentage, 0 to 1" (0.9999), "Reliability: downtime, min/year" (52.98), "Maximum number of users impacted by an outage" (30000), "Maximum duration of an outage, minutes" (30), and "Traffic matrix data file" (msnd_spcov/MSND_demo/traffic_vlrio.csv). The Alcatel-Lucent logo is present in the top right corner of the interface.

A Design Example (2)

- IMS Network Design
 - Determine optimal location for IMS equipment
 - Determine homing arrangements
- MPLS Backbone Design
 - Import network topology - nodes, candidate links and costs
 - Import traffic demands (based on data generated by ACTM)
 - CoS to MPLS CT mapping
 - LSP configuration
 - Min cost greenfield net design
 - TE constraints (BCM, max link utilization, etc)
 - Design output includes network topology and LSP demand routing
- Configuration Design
 - Mid-level equipment configuration and cost summary
- Financial analysis of Revenue from applications, Capex, and OpEx

Equip Configurations

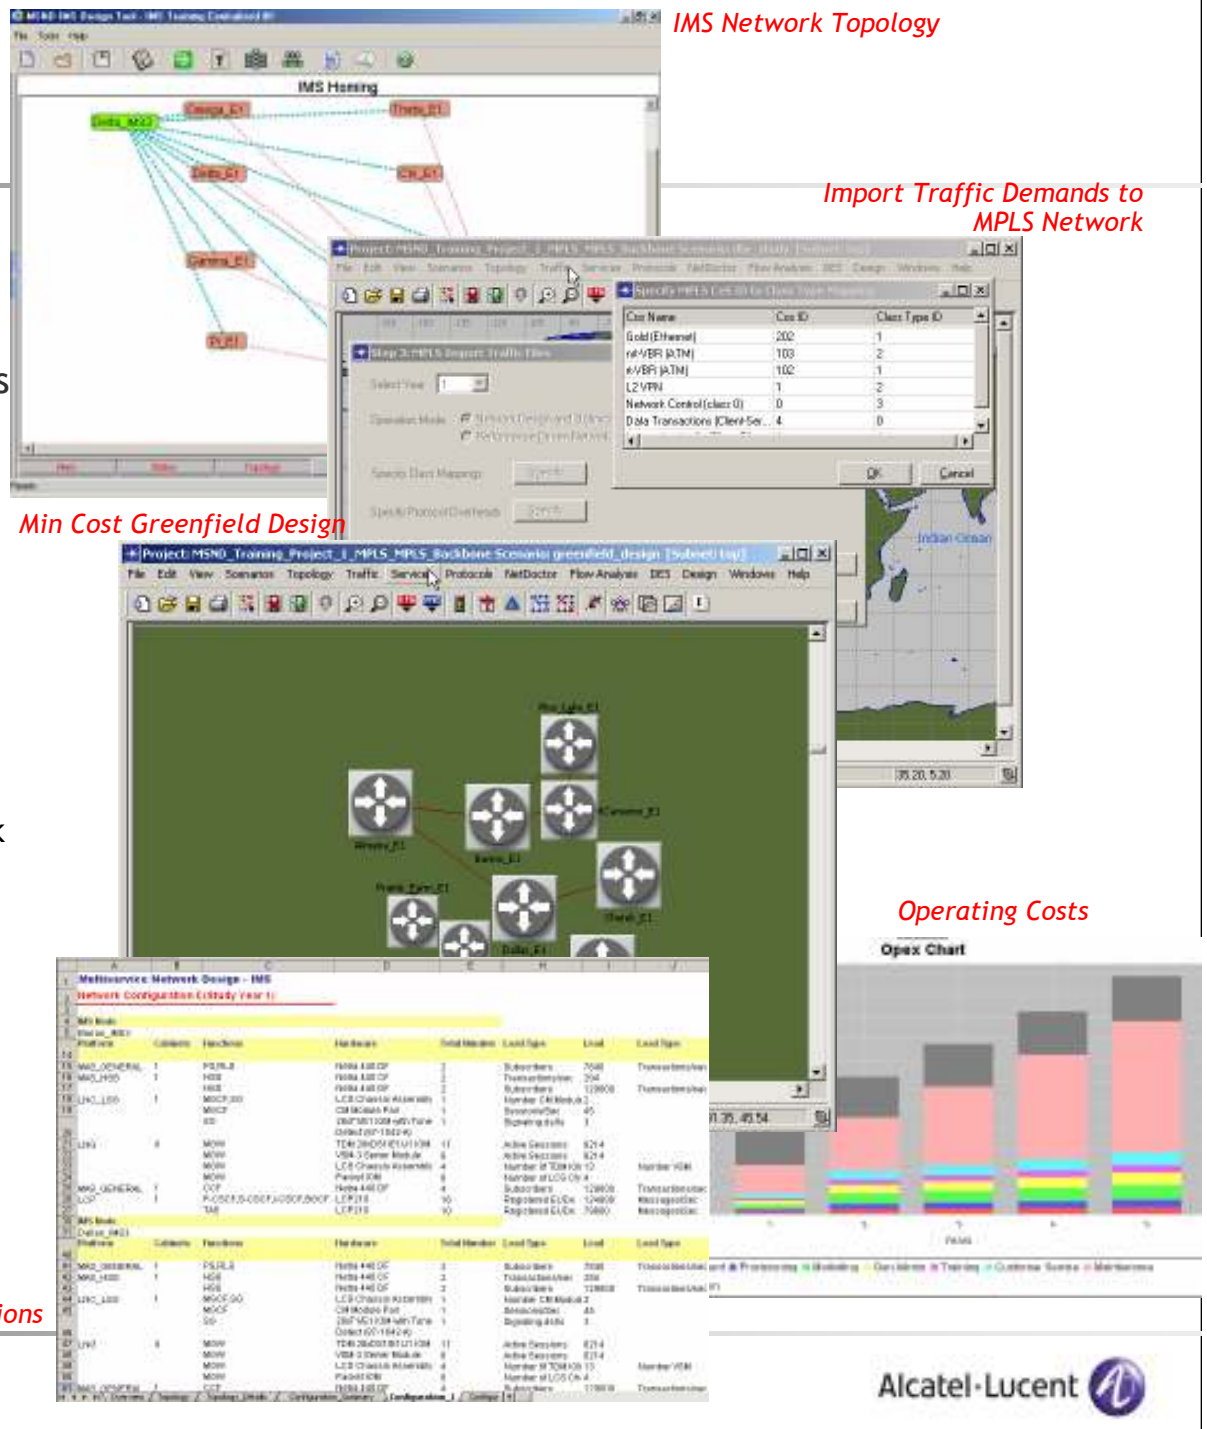

Summary of Key Take-Aways

- Network usage is application driven, and there is a great deal of uncertainty in applications demand and user behavior
- Operators face critical choices in network architecture and technology that can have great impact on their business goals
- A unified multi-service, multi-layer and multi-vendor approach is needed
 - Common application traffic modeling
 - Flow through of results
 - Sophisticated optimization algorithms
 - Automation for “what-if” studies
 - Models that link technical and financial analysis
- The problems are too complex for traditional planning methods